


## Septic Tank - Standard


1000L

Our distinctive septic tanks incorporate the use of a double chamber to ensure better hydraulic efficiency, cleaner effluent discharge, and an improved soak-away performance.

Front view

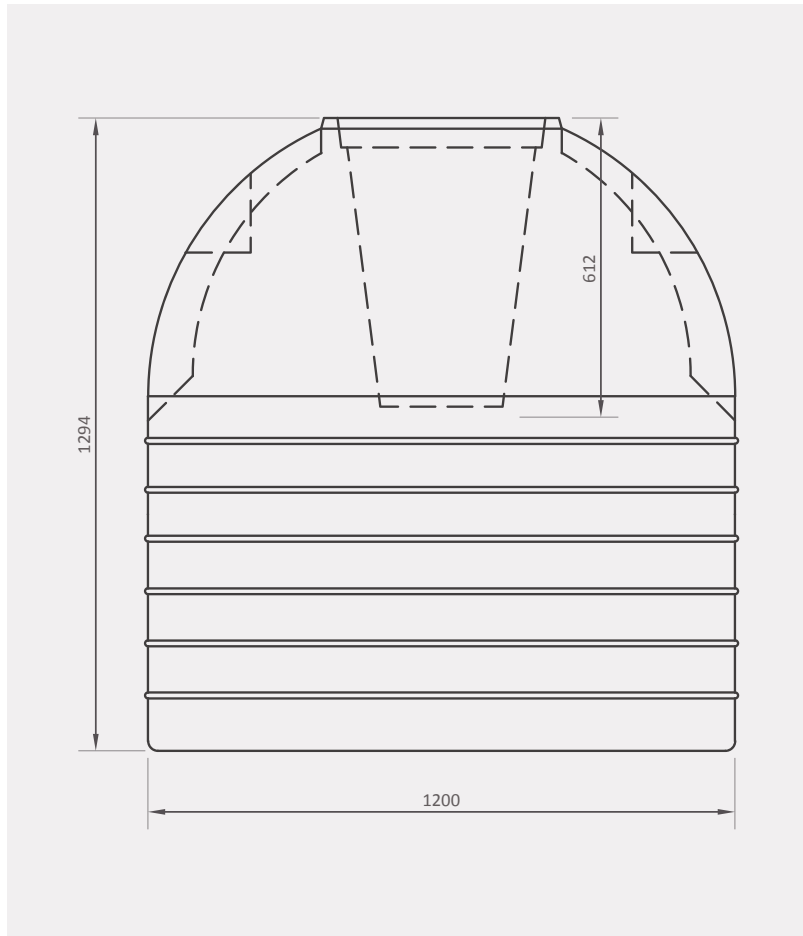

Top view

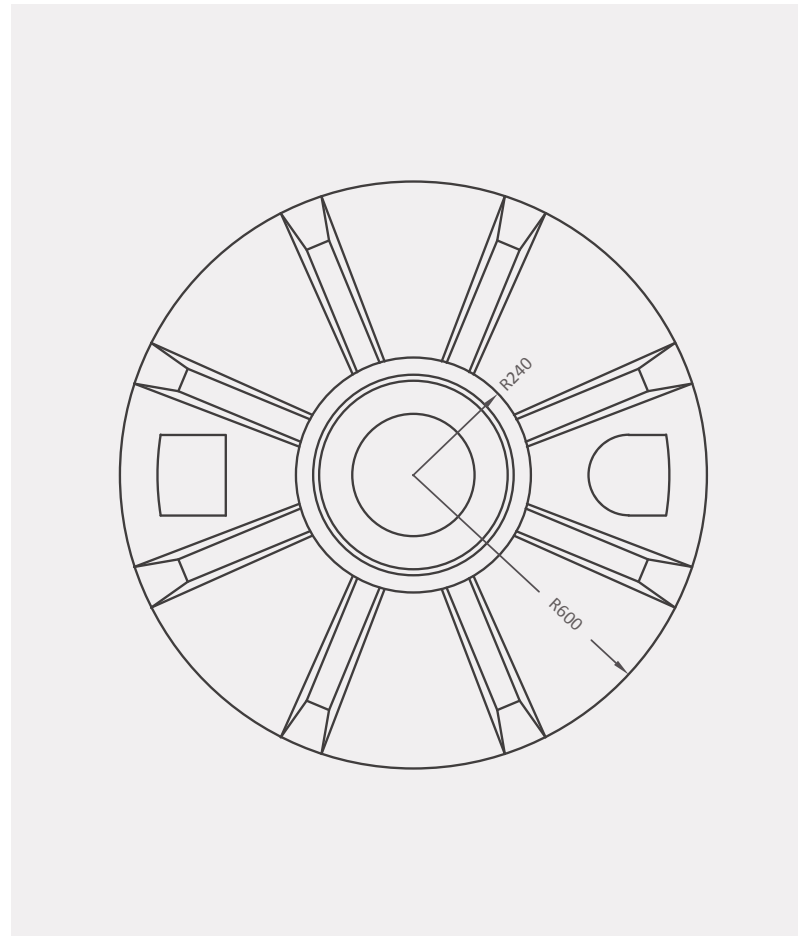

### Product specifications:

#### Capacity:

- Maximum of 4 people assuming 200L per person per day

#### Application:

- Below ground
- Where connection to the sewer line is not feasible/possible
- Soils with a good percolation rate such as sandy soil
- Areas with a low water table in order to prevent contamination of groundwater sources

#### Supplied with:

- 1) 460mm lid
- 2) 50mm socket
- 3) 50mm rubber gasket

#### Recommended additions

##### for installation:

110mm inlet junction, 110mm rubber seal, 110mm rodding eye and 460mm lid extension.

**Note:** these are not included as part of the product offering, but are available at an additional cost.

### Availability:

Standard colour ●

10-year guarantee

All dimensions are in millimetres and the drawings are drawn on a scale of 1:75. The design is the property of Calcamite.