


Septic Tank - SABS


3000L

Our distinctive, SABS-certified septic tanks incorporate the use of an inner chamber to ensure better hydraulic efficiency, cleaner effluent discharge, and an improved soak-away performance.

Side view

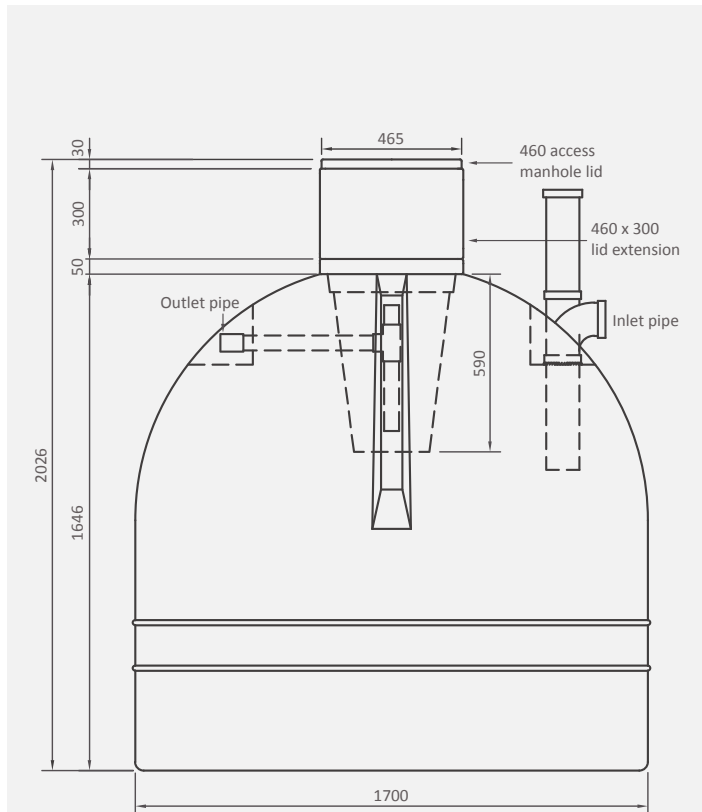

Front view

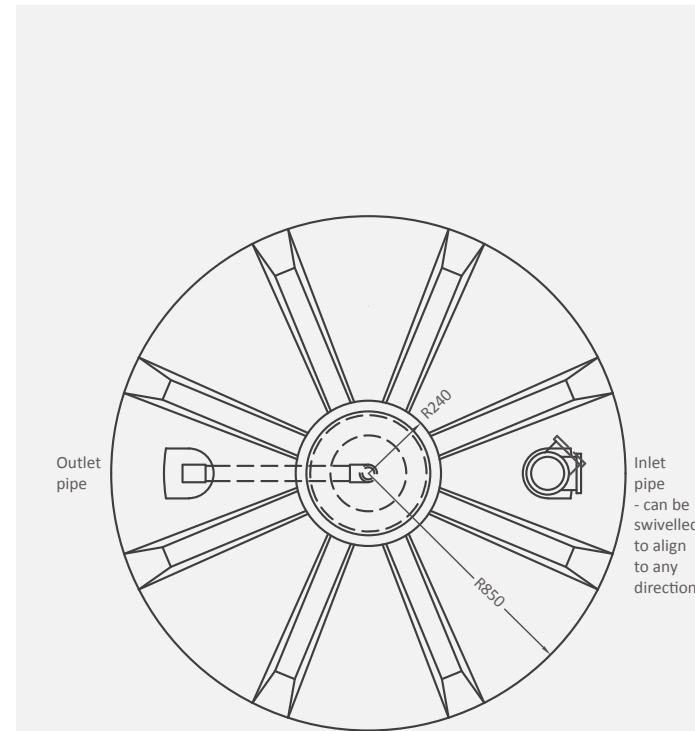

Product specifications:

Capacity:

- Maximum of 12 people assuming 200L per person per day

Application:

- Below ground
- Where connection to the sewer line is not feasible/possible
- Soils with a good percolation rate such as sandy soil
- Areas with a low water table in order to prevent contamination of groundwater sources

Supplied with:

- 110mm junction
- 110mm screw cap (rodding eye)
- 50mm socket
- 110mm rubber gasket
- 50mm rubber gasket
- 110mm (d) x 400mm (l) inlet PVC pipe
- 50mm (d) x 650mm (l) outlet PVC pipe
- 460mm (d) x 300mm (h) extension
- 460mm lid
- 1 x inner chamber with all required internal plumbing

Availability:

Standard colour ●

10-year Warranty

Note: All dimensions are in millimetres and the drawings are not to scale. The design is the property of Calcamite.