


# Sand, Oil and Grease Trap


3000L

Enhance the performance of your wastewater treatment system or safeguard the quality of outgoing water to the municipal supply with our range of traps designed to separate solids, oils, and fats from wastewater before it enters the drainage system.

## Top view

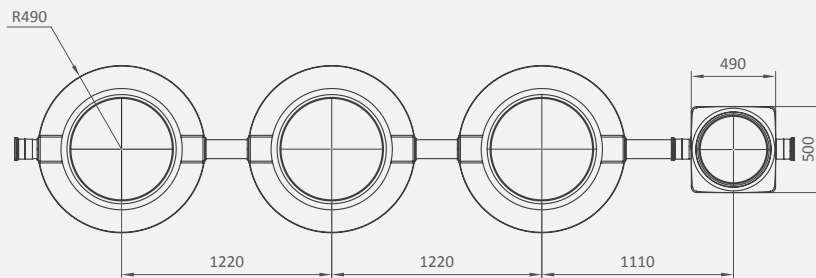

## Front view

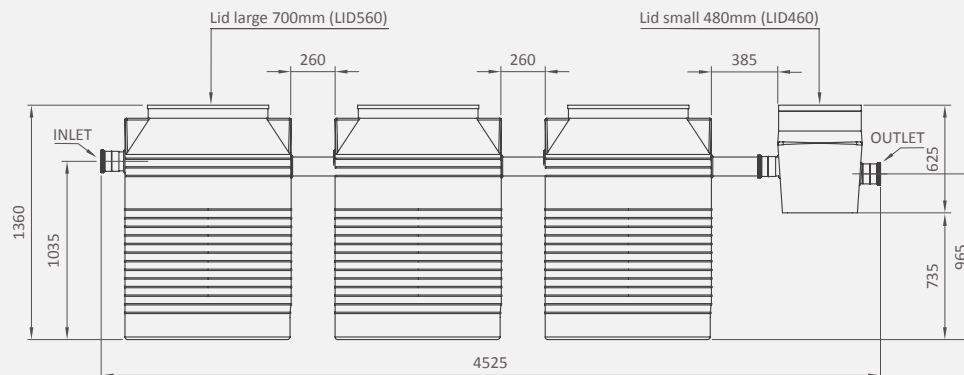

## Product specifications:

### Application:

- Safeguards the quality of outgoing water to the municipal feed to minimise pollution and comply with discharge regulations, or alternatively is utilised to enhance the performance of wastewater treatment plants
- Ideal in any setting where oil, grease, fat or solid waste interacts with the water supply

### Capacity:

- 740L/min

### Supplied with:

- 3x 560mm lids
- 1x 460mm lid
- 3x 110mm sockets
- 3x 110mm junctions
- 3x 110mm end caps
- 8x 110mm gaskets
- 110mm (d) x 1.5m (l) PVC pipe (cut into sections for interlinking the roto-moulded components)

## Availability:

Standard colour ●

10-year Warranty

Meets SANS standards 1025-2 & 50858

**Note:** All dimensions are in millimetres and the drawings are not to scale. The design is the property of Calcamite.