


Sand, Oil and Grease Trap


500L

Enhance the performance of your wastewater treatment system or safeguard the quality of outgoing water to the municipal supply with our range of traps designed to separate solids, oils, and fats from wastewater before it enters the drainage system.

Top view

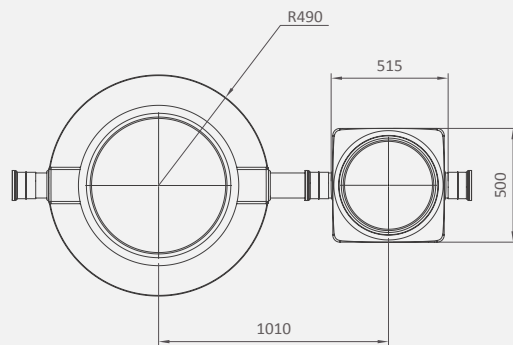

Front view

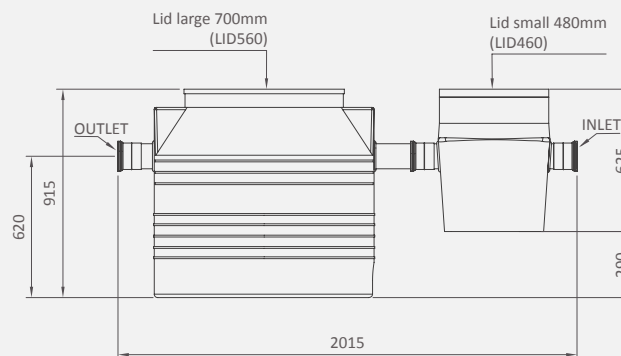

Product specifications:

Application:

- Safeguards the quality of outgoing water to the municipal feed to minimise pollution and comply with discharge regulations, or alternatively is utilised to enhance the performance of wastewater treatment plants
- Ideal in any setting where oil, grease, fat or solid waste interacts with the water supply

Capacity:

- 153L/min

Supplied with:

- 1x 560mm lid
- 1x 460mm lid
- 3x 110mm sockets
- 1x 110mm junction
- 1x 110mm screw cap
- 4x 110mm gaskets
- 110mm (d) x 1m (l) PVC pipe (cut into sections for interlinking the roto-moulded components)

Availability:

Standard colour ●

10-year Warranty

Meets SANS standards 1025-2 & 50858

Note: All dimensions are in millimetres and the drawings are not to scale. The design is the property of Calcamite.